



The **G-climber®** eco

Plug & Play... let's go!

**G-climber® eco by goracon...**  
**...a worthwhile investment.**

Once again it is goracon, setting the standard when it comes to profitably servicing a wind turbine.

The **G-climber® eco** minimizes your efforts for the time-consuming ascends and descends that come with service works.

The advantages are obvious, the lightweight all-in-one mobile drive unit is:

- easy to transport
- can be installed/deinstalled in a second to the x basic unit
- comes with included E-box


Take your benefits from our ideas!

The **G-climber® eco**...

...economical

...comfortable

...one for all

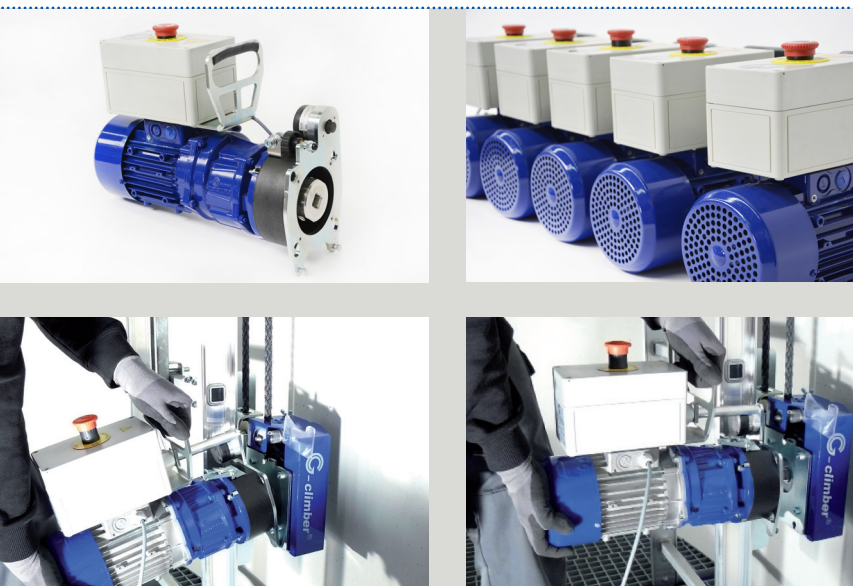

**DEKRA type approved according to the Machinery Directive!**

Your fall protection system must be suitable for use with the G-climber eco. Contact us. We will gladly carry out a combination test according to EN 353-1, if required. We will gladly make you an appropriate offer.

[<mailto:service@goracon.de>](mailto:service@goracon.de)



## Fits to every ladder type!

The **G-climber®** eco is a universal tool available for every ladder type.



Thanks to its elaborate easy-mounting principle the **G-climber®** eco can be installed in wind turbine towers in less than an hour.

The robust mobile unit with its sturdy design is your reliable companion and most impressive is its self-weight of only 14 kg.


...you know us, there's even more to come!

**Goracon already has your solution for frosty areas!**

The **G-climber®** CCV

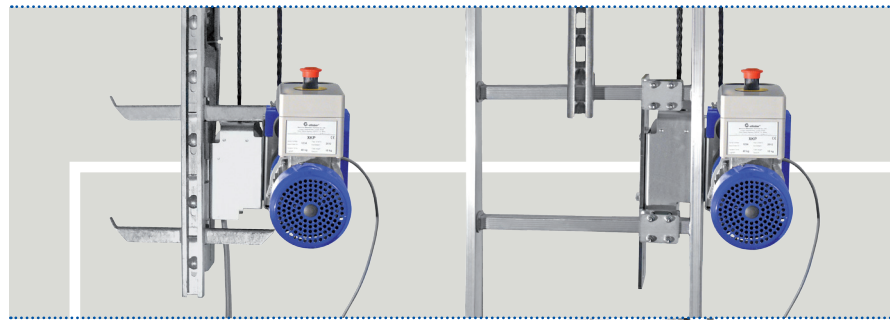


For temperatures from  
-30° to +50° Celsius

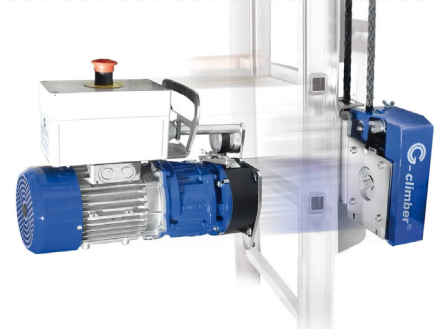

...Cold  
...Climate  
...Version

The proven standard layout with enhanced temperature-resistant E-box and drive technology will be your guarantor of an easy ascend even on frosty days.



### Technische Daten\*

Drive	Spur wheel back-geared motor 0,37/0,55 KW
Strain relief/ traction	up to 40 kg
Power supply	230 V / 50 Hz / IP54 230 V / 60 Hz / IP54 110 V / 60 Hz / IP54 or according to requirements
Mass drive unit	14 kg
Polyester rope	Ø 12 mm Black, pre-stretched with special grip coating
Climbing height	According to project requirements
Material	Galvanized steel / stainless steel / aluminum

\* We reserve the right making alteration to the Produkt program without prior notice. No liability for mistaken or printing errors with regards to product images and product descriptions. Our terms of conditions apply.



goracon systemtechnik gmbh  
Färbereistraße 4  
D-48565 Steinfurt  
Phone +49 2552 9975-0  
Fax +49 2552 9975-10  
[www.goracon.de](http://www.goracon.de)  
[info@goracon.de](mailto:info@goracon.de)

technical specifications  
are subject to change  
status: August 2018